

## ENERGY EFFICIENCY

Thermal Transmission Coefficient

**$U_w \geq 0.83$  (W/m<sup>2</sup>K)**

Please consult typology, dimensions and glazing

## ACCOUSTIC INSULATION

Maximum glazing: **54 mm**

Minimum glazing: **20 mm**

## CATEGORIES ACHIEVED AT TEST CENTRE

Protection against atmospheric agents

Air permeability (EN 12207):

**Class 4**

Water tightness (EN 12208):

**Class E1200**

Wind resistance (EN 12210):

**Class C5**

Reference test 1.23 x 1.48 m / 2 sashes.

|                                                                           |                                                          |
|---------------------------------------------------------------------------|----------------------------------------------------------|
| SECTIONS                                                                  | Classic frame 100 mm<br>Modern frame 70 mm<br>Sash 83 mm |
| PROFILE THICKNESS                                                         | Window 1.5 mm                                            |
| MAXIMUM DIMENSIONS                                                        | Width (L) = 1.500 mm<br>Height (H) = 2.600 mm            |
| MAXIMUM WEIGHT/SASH                                                       | 160 Kg                                                   |
| Please consult regarding maximum weight and dimensions according to types |                                                          |
| GASKETS                                                                   | EPDM triple gasket                                       |
| EXTRUSION ALLOY                                                           | 6063 T-5                                                 |

### POLYAMIDE STRIP LENGTH

Polyamide 6.6 reinforced with 25% fiberglass:  
32 - 39 mm


### OPENING POSSIBILITIES

INWARD casement, tilt & turn, tilt.

### FINISHES

Colour powder coating  
(RAL, mottled, rough...)  
According to Qualicoat >60 microns  
Wood effect powder coating  
According to Qualideco standard  
Anodized  
According to Ewwa Euras  
Standard Class 15  
Optionally Class 20 and 25  
Optionally bicoloured

Classic

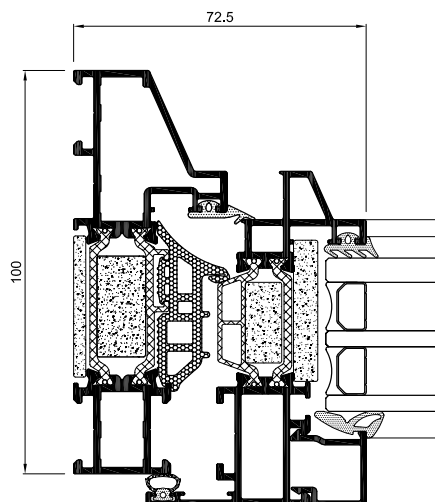

Modern

